


# CADENCE

**CVL**  
EURO SERIES

**CVL-68MBX**

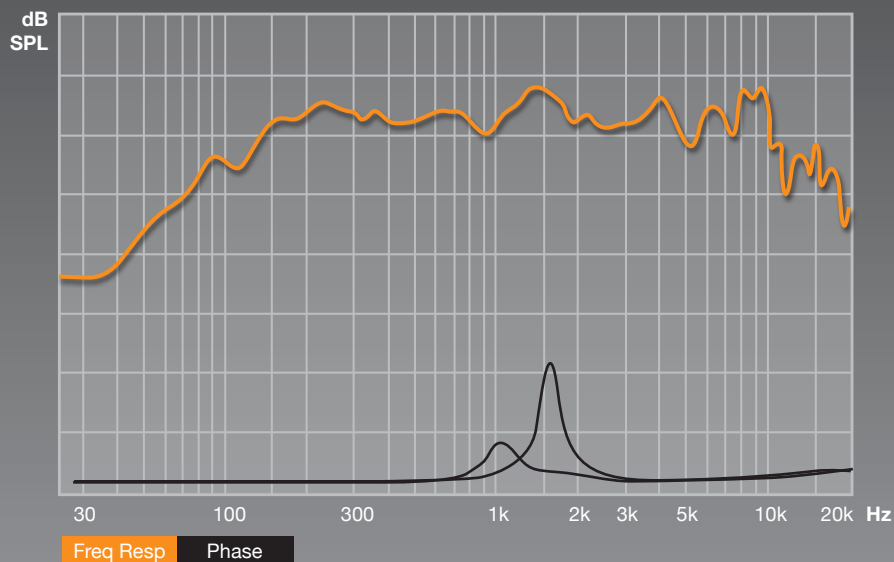

## 6.5 in

### TS PARAMETERS

<b>FMS:</b> 161.4 Hz	<b>BL:</b> 8.6
<b>QMS:</b> 6.31	<b>SPL:</b> 99 dB
<b>QES:</b> 0.96	<b>VAS:</b> 1.9 l
<b>QTS:</b> 0.84	<b>RE:</b> 5.7 Ohm
<b>RES:</b> 13.0 Ohm	<b>RP:</b> 14.9 Ohm
<b>RMS:</b> 2.0 kg/s	<b>LP:</b> 4.9 mH
<b>CMS:</b> 0.08 mm/N	<b>CP:</b> 438.3 uF
<b>MMS:</b> 12.4 gr	<b>LE:</b> 0.5 mH
<b>NREF:</b> 0.82 %	

## 8 Ohm 500 Watts

### SPECIFICATIONS

**Application:** Mid - Base

**Basket Type:** Cast Aluminum

**Dust Cap:** CNC Cast Aluminum Bullet

**Surround Style:** Accordion

**Structure Weight:** 70 oz.

**2" High Power Voice Coil**

**Impedance:** 8 Ohm

**RMS / Peak Watts:** 250 / 500

**Frequency Response:** 90Hz - 9KHz

**SPL @ 1w/1m:** 99dB

### Cadence Acoustics

6519 Highway 9 North • Howell, NJ 07731  
800.477.2328 • 732.370.5400 • fax: 732.370.5553 • www.cadencesound.com

