


CADENCE

ZW1520KD4

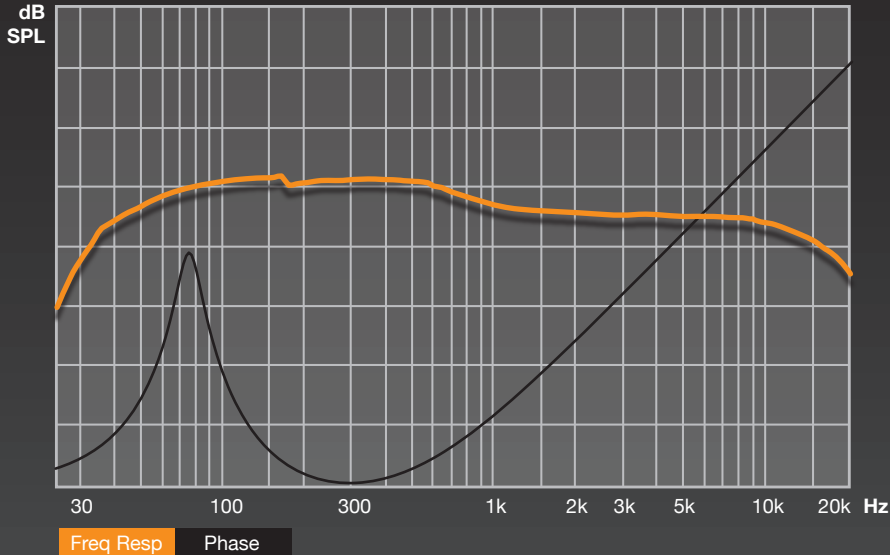

TS PARAMETERS

FO: 35.771 Hz
QMS: 4.572
QES: 0.581
QTS: 0.516
LEVC: 3.385 uH
CMS: 47.026 uM/N
MMS: 420.957 gr
MMD: 403.051 gr
NO: .498 %
BL: 36.093 T/M
SPL: 95 dB
VAS: 65.422 L
RE: 8.0 Ohm
SD: 989.8 cm
MD: 400 g

Dual 4 Ohm 20000 Watts


SPECIFICATIONS

Application: Competition Subwoofer

Basket Type: Cast Aluminum
Cone: Kevlar Reinforced Woven Fiberglass
Dust Cap: Molded Fiberglass
Surround Style: Triple Laminated Foam
Structure Weight: 82lbs
4" Dual High Power Flat Wire Voice Coils


Impedance: Dual 4 ohm
RMS / Peak Watts: 6k / 20k
Frequency Response: 30Hz - 500Hz
SPL @ 1w/1m: 95dB
Sealed Enclosure Size: 3 - 5Cu Ft

15 in






Overall Diameter
15.8 in (402 mm)

Mounting Diameter
14 in (357.5 mm)



Mounting Depth
10.8 in
(275 mm)

Overall Depth
11 in
(279.4 mm)



ENCLOSURE STYLE:

FLATEST RESPONSE (3cu ft)

Enclosure Dim.

Slot Port

Circular Port

System Gain

F-3

Tuning Frequency

SIZE H x W x L

20" x 19" x 19"
(508 x 482.6 x 482.6)

17" x 3" x 13"
(431.8 x 76.2 x 330.2)

4" (circle) x 3" x 12"
(101.6 x 76.2 x 304.8)

+5.65 dB/55 Hz

38 Hz

47 Hz

ENCLOSURE STYLE:

SUPER SPL WALK THROUGH (7cu ft) 2" Wall Thickness

Enclosure Dim.

Slot Port

System Gain

Tuning Frequency

SIZE H x W x L

36" x 23" x 24"
(914.4 x 584.2 x 609.6)

32" x 6" x 2.73"
(812.8 x 152.4 x 69.3)

+12.14 dB/68.5 Hz

66 Hz

Small box dimensions are available. Please call or email for more info.

Cadence Acoustics

6519 Highway 9 North • Howell, NJ 07731
 800.477.2328 • 732.370.5400 • fax: 732.370.5553
 cadence@cadencesound.com • www.cadencesound.com

